
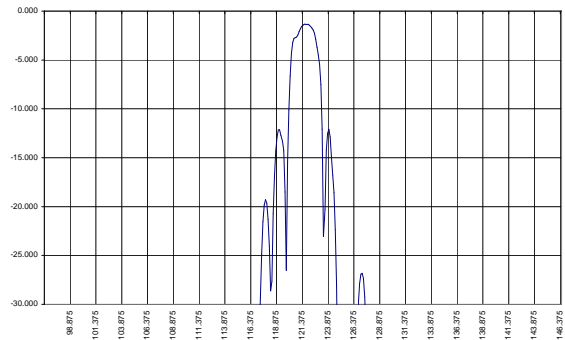


Low Loss SAW Front End 121.5 MHz Filter Bandwidth 2.4 MHz

Part Number A022-121.5M1

Typical performance

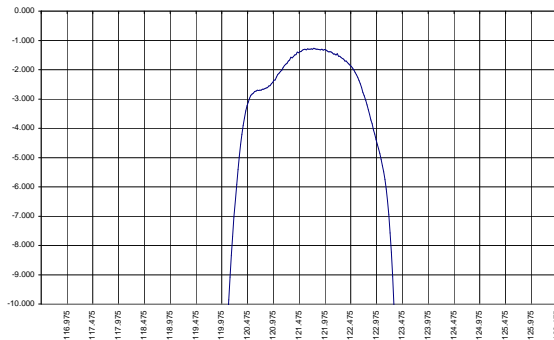


Specifications

Parameter	Unit	Min	Typ	Max
Central frequency	MHz	121.25	121.50	121.73
Inserted loss	dB	1.0	1.3	1.6
Bandwidth @-2dB	MHz	2.20	2.30	2.40
Bandwidth @-30dB	MHz		7.50	
Amplitude ripple (100% @-2 dB bandwidth)	dB	0.5	0.8	1.0
Ultimate rejection	dB	-	45.0	-
Substrate		-	128 LNO	-
Temperature range	°C	-55.0		85.0

Notes:

1. The design, manufacturing process, and specifications of this filter are subject to change.
2. Specification valid for measurements in AEC Design test fixture

Case

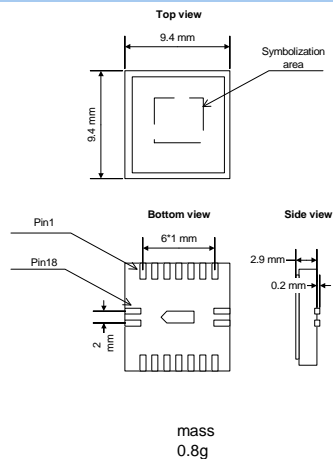

Matching

