



# Low Loss SAW 26.025 MHz Filter

Bandwidth 0.027 MHz

Part Number A209-26.025M1

## PRELIMINARY DATA

### Typical performance

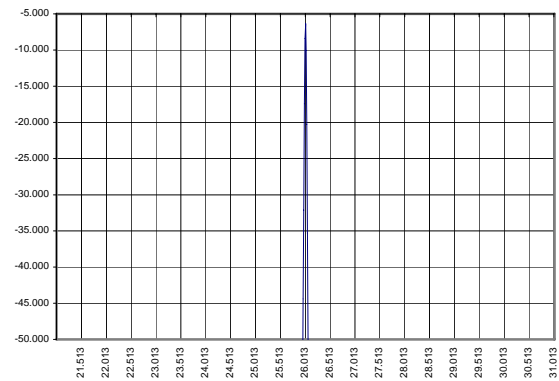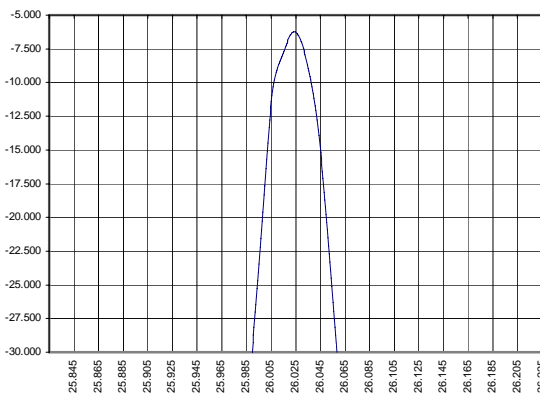


### Specifications

Parameter	Unit	Min	Typ	Max
Central frequency	MHz	26.021	26.025	26.030
Inserted loss (unmatched)	dB	5.5	6.5	8.5
Bandwidth @-3dB	MHz	24	29	31
Shape factor @-3dB/-40dB		-	3.4	3.6
Amplitude ripple	dB	-	1	-
Ultimate rejection	dB		-70	
Substrate			36 YX quartz	
Temperature range	°C	-40		85

#### Notes:

- The design, manufacturing process, and specifications of this filter are subject to change.
- Specification valid for measurements in AEC test fixture

### Case

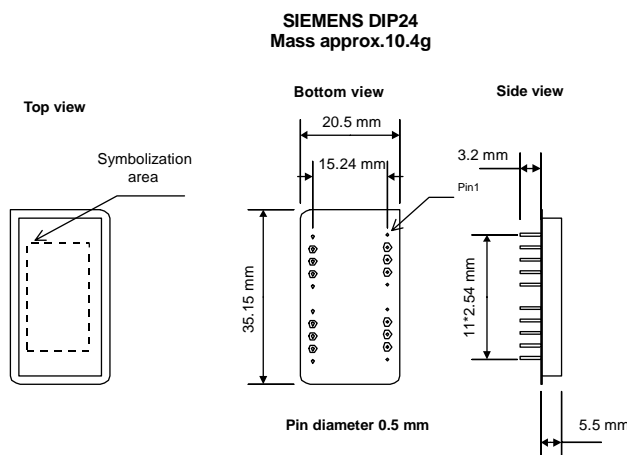

### Matching

