





Low Loss SAW 1290 MHz Filter

Bandwidth 22 MHz

Part Number A241-1290M1

PRELIMINARY DATA

Typical performance

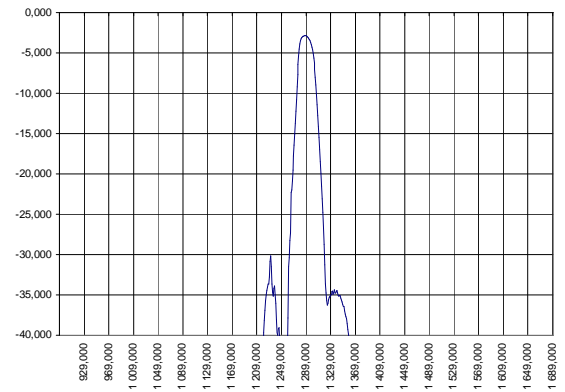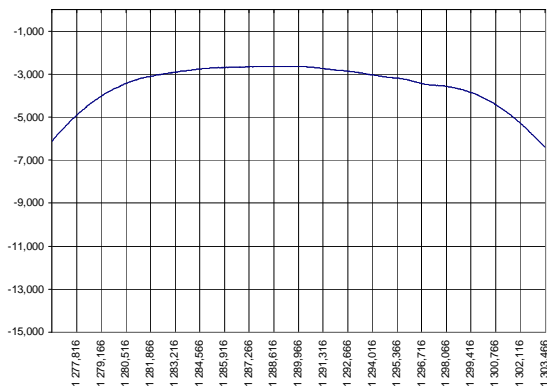


Specifications

Parameter	Unit	Min	Typ	Max
Central frequency	MHz	1289	1290	1291
Inserted loss (unmatched)	dB	-	2.7	3.5
Bandwidth @ -2dB	MHz	21	22.0	23
Bandwidth @ -28dB	MHz	-	59	59.5
Amplitude ripple	dB	-	0.6	1.5
Ultimate rejection	dB	-	40	-
Substrate			36LTO	
Temperature range	°C	-55		85

Notes:

1. The design, manufacturing process, and specifications of this filter are subject to change.
2. Specification valid for measurements in AEC Design test fixture

Case

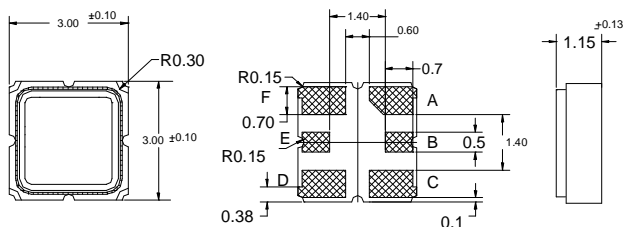

Matching

